



WESTPOINT®
Create emotions




ACS

WALL SPLIT AIR CONDITIONER INVERTER COOL AND HEAT PUMP

CLIMATISEUR SPLIT MURAL INVERTER REVERSIBLE
AIRE ACONDICIONADO TIPO SPLIT INVERTER FRÍO Y CALOR

T1 R32 / ROTARY / 220-240 V - 1 PH 50 Hz

A+++

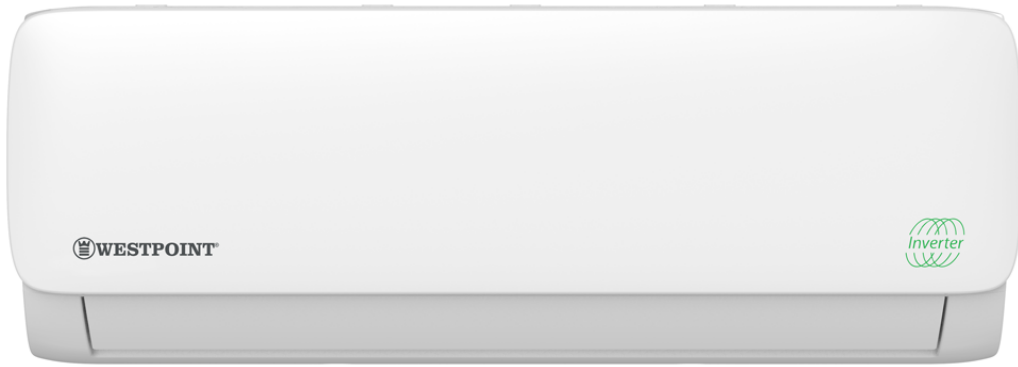

WIM-09320.MH
Cap 9000 BTU

WIM-12320.MH
Cap 12000 BTU



KEY FEATURES

- A+++ Energy Class
- Gold Fins
- Auto Restart
- LED Display
- I FEEL Function
- Inverter Compressor



Specifications are subject to possible modifications without prior notice. Pictures and datas are not contractual / Les caractéristiques sont susceptibles d'être modifiées sans préavis.
Les photos et indications sont non contractuelles / Las especificaciones están sujetas a cambios sin previo aviso. Las fotografías e indicaciones están no contractuales.

(C) westpoint@cfee.com - AIR SPM SHU 09JUL20

		WIM-09320.MH	WIM-12320.MH
T1 Cooling capacity	(Btu)	9000	12000
	(W)	2639	3519
	(frig/h)	2250	3000
T1 Heating capacity	(Btu)	10000	13000
	(W)	2932	3812
	(frig/h)	2500	3250
T1 Cooling mini/maxi	(W)	1026-3225	1378-4310
	(Btu)	3500-11000	4700-14700
T1 Heating mini/maxi	(W)	821-3372	1070-4384
	(Btu)	2800-11000	3650-14950
Input power cooling	(W)	659	1004
Input power heating	(W)	674	969
Rated current cooling	(A)	2.86	4.36
Rated current heating	(A)	2.93	4.21
Air flow	high - (m3/h)	510	520
	medium - (m3/h)	360	370
	low - (m3/h)	300	310
Inverter		Yes	Yes
Gas refrigerant		R32	R32
Charge	(g)	620	620
SEER		8.5	8.5
SCOP		4.3	4.4
Voltage	(IDU V-Ph)	220-240 V - 1 PH	220-240 V - 1 PH
	(ODU V-Ph)	220-240 V - 1 PH	220-240 V - 1 PH
Frequency	(Hz)	50 Hz	50 Hz
FEATURES			
Indoor unit			
Net dimensions	height - (mm)	208	208
	width - (mm)	835	835
	depth - (mm)	295	295
Net weight	(kg)	8.7	8.7
Sound pressure	high - (dBA)	37	38
	medium - (dBA)	33	33
	low - (dBA)	22	22
Rated current	(A)	10	10
Rated input	(W)	2150	2150
Outdoor unit			
Net dimensions	height - (mm)	555	555
	width - (mm)	765	765
	depth - (mm)	303	303
Net weight	(kg)	26.2	26.2
Noise level	(dBA)	60	64
Rated current	(A)	10	10
Rated input	(W)	2150	2150
Compressor type		ROTARY	ROTARY
Connection pipe	maxi length allowed - (m)	25	25
	maxi height allowed - (m)	10	10
	diameter liquid - (mm inch)	6.35 - 1/4	6.35 - 1/4
	gas connexion - (mm inch)	9.52 - 3/8	9.52 - 3/8
OPTIONS			
LED display		Yes	Yes
Timer	(h)	24	24
I Feel* * This function maintains the set temperature where the remote controller is located		Yes	Yes
Wi-Fi		OPTION	OPTION
STANDARD			
CE Standard		CE	CE
IEC Standard		IEC	IEC
RoHS Standard		RoHS	RoHS